



The Superior™ direct-vent family of fireplaces offer large viewing areas and a slim firebox depth to bring the fire closer to the room, providing a stunning presentation. SSDV units are heater-rated and provide efficient heat circulation for relaxing room warmth.



**SSDV-4035** shown with optional brass louver kit




**SSDV-3328** shown with optional brick liner kit



SSDV-3328  
Top Vent Model Shown

SSDV-3530  
Top Vent Model Shown

SSDV-4035  
Rear Vent Model Shown

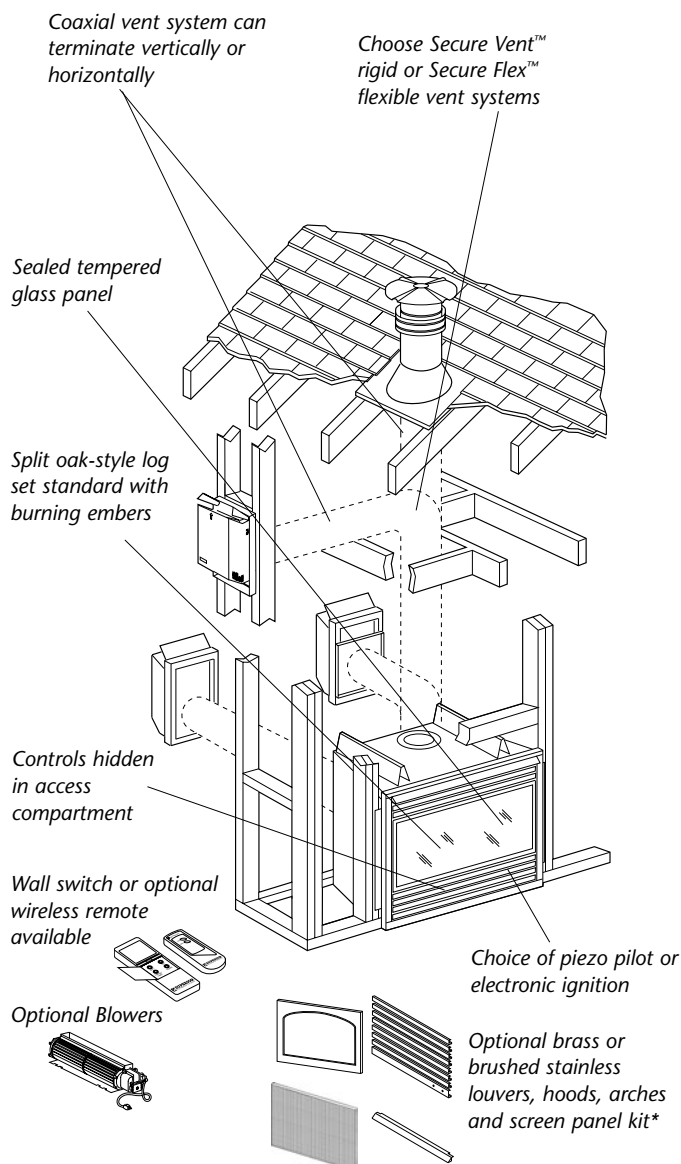

## STANDARD FEATURES

Top or rear vent outlets

Flex connector with shut off

Wiring for optional wall switch

Millivolt (standing pilot) or intermittent electronic ignition


Louvers

Logs, embers and lava rock

Variable hi/lo valve (millivolt models only)

## DIMENSIONS


	SSDV-3328	SSDV-3530	SSDV-4035
A	33-1/8"	35-1/8"	40-1/8"
B	30-1/8"	32-1/8"	37-1/8"
C	17"	19"	24"
D	27-1/2"	29-1/2"	34-1/2"
E	33-1/8"	35-1/8"	40-1/8"
F	19-5/8"	21-11/16"	26-11/16"
G	21-1/2"	24-7/8"	29-7/8"
H	16-9/16"	17-9/16"	20-1/16"
J	6-13/16"	9"	9"
K	13"	16"	16"
L	8-11/32"	9-3/8"	9-3/8"



Front View

## FRAMING DIMENSIONS

	WIDTH	HEIGHT	DEPTH
SSDV-3328	33-1/4"	33-1/4"	13"
SSDV-3530	35-1/4"	35-1/4"	16"
SSDV-4035	40-1/4"	40-1/4"	16"

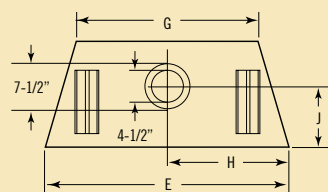

Top View  
(Top vent shown)


## BTU/HR CHART

	NATURAL OR PROPANE
SSDV-3328	13,500 - 17,500
SSDV-3530	17,500 - 23,000
SSDV-4035	21,500 - 29,000

## FIREPLACE EFFICIENCY %

		3328-T	3328-R	3530	4035
ENERGUIDE**	NG	45	53	55	60
	LP	49	55	60	61
STEADY STATE	NG	64	63	67	69
	LP	66	66	68	69
A.F.U.E.	NG	62	61	63	65
	LP	64	64	64	65

\*\* Intermittent ignition systems

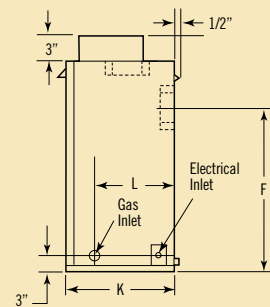

Right Side View  
(Rear vent shown)

\* Screen panel kit provides a barrier to prevent direct contact with hot glass surface

## IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale - consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Built to ANSI Z21.88 and CSA 2.33 standards.

Consult your distributor for local fireplace code information.

Tested & Listed By  
OMNI-Test Laboratories, Inc.



Beaverton  
Oregon USA

OTL Report No. 116-F-29-5



©Lennox Industries Inc. 2008

Visit us at [www.Lennox.com](http://www.Lennox.com), or contact us at 1-800-9-LENNOX.

785155M 01/08

All Superior gas fireplaces include a 20-year limited warranty and are listed by nationally recognized listing agencies.

